

# ACCESSORIES AND EQUIPMENT

## HAKKIPIILKE CLEANER

Length	2,870 mm	9'5"
Width	1,190 mm	3'11"
Height, adjustable	max 2,870 mm	9'5"
Weight	500 kg	1,102 lbs

\* Weight without outfeed conveyor.

Cleaning the firewood speeds up the drying process and ensures consistent quality. The outfeed conveyor moves the firewood to the rotating drum of the Cleaner which separates debris and moves it to the desired location with guide plates. From the Cleaner, the firewood can be conveyed into sacks, for example, using the guide plate (standard equipment).

The laterally pivoting outfeed conveyor (3 m/9.84 ft), which is available as an accessory, can be used to convey the firewood onto a trolley, for example. The Hakki Pilke Cleaner is available with an electric or hydraulic drive. Thanks to its adjustable height, the Cleaner can be connected to almost all firewood processor models.



## HAKKIPIILKE ROLLER

Length	3,400 mm	11'2"
Width	1,515 mm	4'12"
Height, adjustable	2,155-3,020 mm	7'1"-9'11"
Weight	950 kg *	2,094 lbs

\* Weight without outfeed conveyor.

Hakki Pilke Roller was designed for cleaning large quantities of firewood. The wood is guided into the Roller using the firewood processor's outfeed conveyor or a loader, for example. The vibrating rollers separate all debris from the firewood, ensuring a high-quality end result. The pivoting 3-metre outfeed conveyor – previously featured in the Cleaner – is available for the Roller cleaner as an accessory. The Roller is electrically driven and only available in selected markets.



## HAKKIPIILKE POWERPACK

Length	1,020 mm	3'4"
Width	1,230 mm	4'0"
Height	1,000 mm	3'3"
Weight	165 kg *	364 lbs

\* Weight without engine.

The Powerpack is a compact yet efficient alternative power source for tractor-powered or combi Hakki Pilke firewood processors. It is the perfect solution when you need the tractor for other tasks, such as moving logs instead of running the firewood processor, or when sufficient power supply is unavailable. You can purchase the Powerpack either with nothing more than the chassis or as a complete package including the engine. Enquire about the available engine alternatives from your retailer.



## OUTFEED EXTENSION

Length *	1 m	3'3"
----------	-----	------

\* OH 27 firewood processor 0.8 m (31")

The machine can be placed in the transport position only with the original outfeed conveyor. Pay attention to transport when installing the outfeed extension.



## HAKKIPIILKE BLOWER

Length	530 mm	21"
Width	325 mm	13"
Height	410 mm	16"
Weight	17 kg	37 lbs


The integrated Hakki Pilke sawdust removal efficiently moves sawdust to the desired location through a discharge hose. This keeps the surroundings of the machine clean, and no valuable time is wasted on clearing away sawdust. The integrated sawdust removal utilises the machine's own hydraulics. It is a standard feature of the Easy 50s models and can be purchased for nearly all chain saw models as an accessory. Note! Saw dust removal dimensions without the fastening mechanism.



## AUTOMATIC CHAIN TENSIONER AC10

Operation	Hydraulic	Mechanical
Compatibility	43 Pro	38 Pro
Bar	18"	16"
Saw chain	.404 1.6 mm 68 vl	.325 1.5 mm 68 vl

The AC 10 keeps the firewood processor chain at an optimal tension, thus preventing the chain from disconnecting and breaking. The correct chain tension notably increases the service life of the chain and bar. The AC 10 requires no manual tensioning. The automatic chain tensioner makes replacing the chain quick and easy.

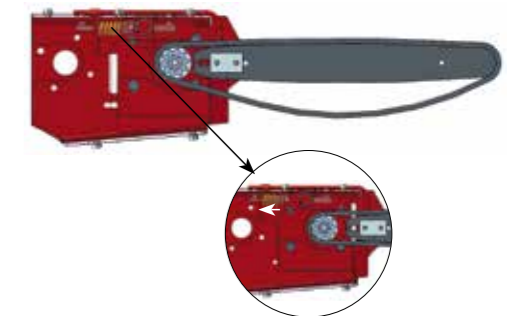

## HYDRAULIC INFEED ROLLER

The hydraulic infeed roller ensures efficient operation.



## TOOL BOX

The tool box attached to the machine ensures that important tools are always at hand by the machine.



## HYDRAULICALLY PIVOTING OUTFEED CONVEYOR

The laterally pivoting hydraulic outfeed conveyor is effortless to use and lets you guide the logs to the desired position.

