

HAKKIPIILKE®

38 Pro

+ HAKKICUT™



Hakki Pilke 38 Pro brings unparalleled efficiency to firewood processing. An effortless, ergonomic and efficient HakkiCut™ cutting control enables sawing with a single press of a joystick button. During cutting, the lowering speed of the saw bar is automatically adjusted according to the resistance, ensuring an efficient and fast process. At a splitting force of 10 t, the 38 Pro can split even the hardest wood, achieving a splitting cycle of no more than 3 seconds.

In the 38 Pro processor, the AC10 automatic chain tensioner functions mechanically. The patented AC10 system maintains the chain at optimal tension, improving the efficiency of the sawing process and providing a significant increase to the life span of the chain and bar. In addition to sawing and cutting, the joystick is used to adjust the height of the splitting blade and control the infeed conveyor. The 38 Pro model also features the familiar Hakki Pilke cleaning outfeed conveyor, which separates debris from firewood without any additional accessories. As a new feature, the machine also includes a control valve for the outfeed conveyor – this can be used to reverse or stop the conveyor belt as necessary.

- NEW USER INTERFACE
- ELECTRICAL CONTROL OF CUTTING AND SPLITTING
- PLENTY OF POWER
- NO V-BELTS OR MECHANISM THAT ARE SUBJECT TO WEAR



Electrical control of sawing and splitting with just two buttons.



Patented cleaning outfeed conveyor as standard. The groove at the end of the outfeed conveyor separates debris from the firewood.

TECHNICAL SPECIFICATIONS

Max log diameter	380 mm	15"
Max log length	600 mm	24"
Maximum splitting power	10 t	
Bar	16"	
Power source	PTO, electric, combi	
Splitting blade	2/4-way	
Outfeed conveyor length	4 m	13'1"
Infeed conveyor length	2.2 m	7'2"

STANDARD EQUIPMENT

- Infeed serial connection kit + valve
- Accessory valve
- Hydraulic infeed conveyor
- Safety cover
- AC10 automatic chain tensioner (mechanical)
- HakkiCut™ cutting control
- Automatically optimised cutting speed
- Automatic chain oil lubrication
- Hydraulic splitting blade adjustment
- Automatic speed valve
- Pivoting outfeed conveyor
- Outfeed conveyor speed control + reverse
- Cleaning outfeed conveyor
- Tool box

DIMENSIONS IN TRANSPORT POSITION

Height	2,520 mm	8'3"
Length	2,480 mm	8'1"
Width	1,300 mm	4'3"
Weight	880 kg	1,940 lbs

OPTIONAL EQUIPMENT

- Hydraulic infeed roller
 - Infeed guide plate
 - Optical measuring device
- | | | |
|---|----------------------|------|
| Splitting blade | 6, 8-way | |
| | 12-way for soft wood | |
| Hydraulically pivoting outfeed conveyor | | |
| Outfeed conveyor extension | 1 m | 3'3" |
| Blower saw-dust removal | | |
| Oil heater | | |
| Oil cooler | | |

ACCESSORIES

- HakkiFeed 371, 422, 471, 472
- HakkiLift 381
- Hakki Pilke Cleaner
- Hakki Pilke Roller
- Powerpack



Together, the AC10 and electrical saw control ensure fast and uninterrupted operation.




The ergonomic and easy-to-use control panel includes all the controls needed to operate the machine.



Large oil tank capacity and sight glass.

**PRO SERIES
WITH
UNPARALLELED
POWER AND
EFFICIENCY**

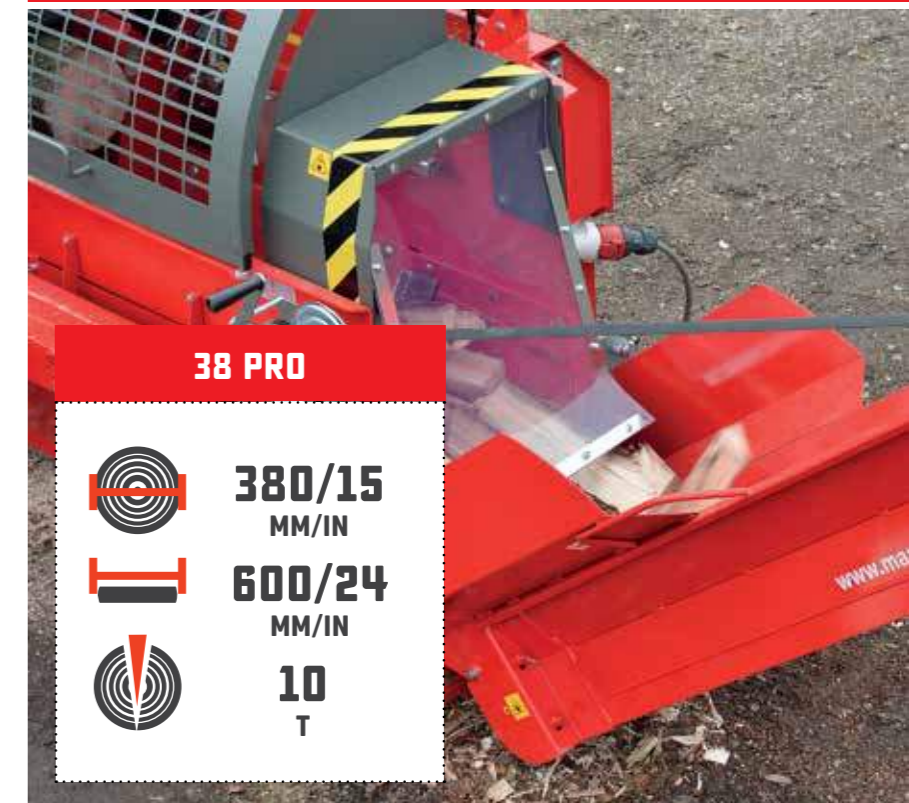

38 PRO



**380/15
MM/IN**



**600/24
MM/IN**



**10
T**