Rabaud

VACUUM CLEANERS

On side panel WINDY RE





Rabaud

advantages



WINDY 491 RE WINDY 491 RE

WINDY 491 RE

Hydraulic setting up of the machine onto the side panel

- with the trolley (only I person required) to control musculo-skeletal disorder risks: a RABAUD exclusivity
- Drive by I4 HP VANGUARD petrol engine (3- year warranty), electrical starting.
- Big diameter turbine (490 mm) for more air flow. Turbine volume with 5-year guarantee.
- More security: the turbine is stopped in less thank 10 sec. thanks to the hydraulic brake.
- Off-centered rotor to avoid jam.
- 5 meter sleeve mounted on aluminium swiveling support and control wheel.
- Adjustable inclination of the duct; possibility to fold it up at transport.
- Life bearing lubrication = no maintenance needed.
- In option, casing kit for dump truck.
- Machine complying with the French nom NF X39-105.


TECHNICAL CHARACTERISTICS

MODEL	WINDY 491 RE
Turbine diameter	490 mm
Rotor diameter	402 mm
Blades number	6 removable
Sleeve	5 m, Ø 200 mm
Dimensions (LxWxH)	1.05 x 1.75 x 1.78 m
Weight	260 Kg
Coupling	Side panel (1.20 m to 1.70 m height) Thickness from 15 to 80 mm
Drive	Heat engine VANGUARD 3-year warranty
Motor power	10,5 kW / 14 HP petrol

STANDARD EQUIPMENT -

- Big diameter turbine with 6 removal volute
- Turbine volute (5-year warranty)
- 5 m sucking sleeve, Ø 200 mm.
- Transport trolley is part of the machine with 2 swivelling braked wheels and 2 fixed wheels, self-locking system on the sideboard.



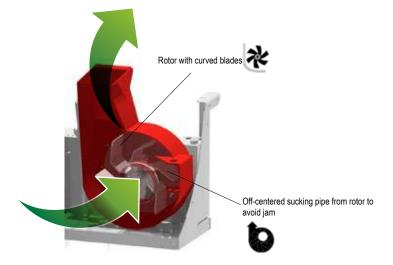



Rabaud

VACUUM CLEANERS

On road trailer WINDY ME








WINDY 491 ME WINDY 491 ME WINDY 660 ME

Rabaud

advantages

- 2 models on road trailer with jockey wheel, light ramp, ball coupling.
- Drive by petrol engine (14 or 22 HP), electrical starting.
- Big diameter turbine (490 mm on WINDY 491 and 660 mm on WINDY 660) for more air flow. Turbine volume with 5-year guarantee.
- Off-centered rotor to avoid jam.
- More security: the turbine is stopped in less thank 10 sec. thanks to the hydraulic brake (WINDY 491).
- 5 meter sleeve (200 mm Ø and aluminium gripping handle) and control wheel.
- Fixed outlet blower on WINDY 491 and 360° swiveling on WINDY 660; both foldable for transport.
- Road trailer < 750 Kg, transport speed: I30 Km/h.
- In option, casing kit for dump truck.

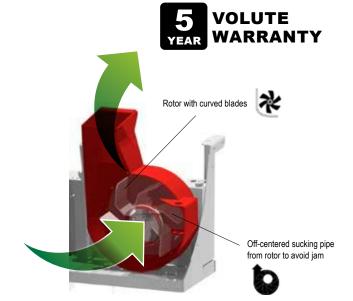

TECHNICAL CHARACTERISTICS

MODELS	WINDY 491 ME	WINDY 660 ME
Turbine diameter	490 mm	660 mm
Ø rotor	402 mm	460 mm
Blades number	6 removable	
Sleeve	5 m, Ø 200 mm	
Dimensions (LxWxH)	2.46 x 1.46 x 1.66 m	3.70 x 1.44 x 1.65 m
Weight	330 kg	440 kg
Adaptation	Road trailer	
Drive	Heat engine VANGUARD - 3-year warranty	Heat engine Honda - 3-year warranty

